

CLAMCO HEAT SHRINK TUNNELS

Quality-designed dependable performers, our 7221 and 6022 tunnels are the ideal choices for use with 6700 Series Sleeve Wrappers.

MODEL 7221 Production Shrink Tunnel

Standard Features

- Chamber area 46" L x 22" W x 10" H
- Digitally controlled heat to 450°; variable air velocity control
- 14,500 watts heating power; adjustable pattern; 220V
- Separate conveyor 20" W x 71" L; speed 0-125 fpm
- Fully insulated chamber; double entry/exit curtains
- Air-cooled controls
- Sturdy steel base with casters
- Silicone-covered roller conveyor (rotating or nonrotating)
- Conveyor cooling fan
- Overall dimensions: 71" L x 37" W x 67" H

Options: Additional rollers, fiberglass mesh or stainless-steel mesh conveyor, stainless-steel construction, spare parts kit



Model 7221 Production Shrink Tunnel

MODEL 6022 Heat Shrink Tunnel

Standard Features

- Chamber area size up to 34" L x 22" W x 10" H
- 9,000 watts heating power, 220V, single phase
- Variable-speed 60"-long quick-adjusting live/dead silicone roller conveyor with 1.5" spacing
- Digital precision temperature control; automatic cool-down
- Heavy-duty console with levelers
- Overall dimensions: 60"

Options: 1" roller spacing, mesh belt overlay, variable air velocity, locking casters, 208V3 phase



Model 6022 Production Shrink Tunnel

Distributor:

CLAMCO
CORPORATION

Your one source for packaging systems since 1946

12900 Plaza Drive Cleveland, OH 44130

1-800-299-1655 216-267-1911

Fax 216-267-8713

www.clamcocorp.com

e-mail: info@clamcocorp.com

One or more of the following U.S. Patents apply: 5,372,494; 5,381,640; 5,423,162; 5,842,320.
Specifications and design features subject to change without notice. Some photos may show accessories not part of basic machine.
Printed in U.S.A. © 2007 Clamco Corp.

CLAMCO
CORPORATION

Your one source for packaging systems since 1946



6700 SERIES

**AUTOMATIC
L-BAR
SEALERS**

6700 SERIES AUTOMATIC L-BAR SEALERS



MODEL 6700GLX

Our top-of-the-line producer

The choice for outstanding speed, throughput and performance to maximize your productivity and profits.

Standard Features

- Production speeds of up to 40 packages per minute
- Heavy-duty hot knife sealing system with 18" x 23.5" seal area
- Allen-Bradley (PLC) controller
- Touch-screen interface with diagnostics
- Product memory for up to 20 package configurations
- Lower film cradle with film splitter and static eliminator
- Adjustable jaw opening for products up to 8" high
- Product alignment guides
- Horizontal and vertical product sensors
- Variable conveyor speed – up to 100 fpm
- Self-adjusting scrap take-up reel
- Micro-Perf perforators for uniform air evacuation
- Variable-speed film unwind (23" maximum film width)
- Casters and levelers
- Made in U.S.A.
- USDA approved
- One-year limited warranty

Specifications


- 110V, 80 psi / 1 cfm, 120V, 15A
- Overall dimensions: 69"L x 50"W x 51"H

Options

- Various seal knife options available
- Tunnel controls integrated through PLC and interface (6022 and 7221 Tunnels)
- Closing conveyor
- Printed film registration
- Split conveyor for product staging
- Light package takeaway
- And many more



Shown with Heat Shrink Tunnel Model 6022, available separately.

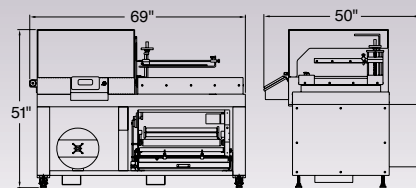

MODEL 6700LX

Great performance and value

A very solid value, with many 6700 advantages, when production flexibility is less of a requirement.

Standard Features

- Production speeds of up to 35 packages per minute
- Heavy-duty hot knife sealing system with 18" x 23.5" seal area
- Programmable Allen-Bradley PLC touch-screen control
- Fixed speed conveyor and film advance speed – 60 fpm
- Variable jaw opening to 4" high
- Vertical product sensor
- Upper film cradle with pinwheel perforator system
- Casters and levelers
- Made in U.S.A.
- USDA approved
- One-year limited warranty

Specifications


- 110V, 80 psi / 1 cfm, 120V, 15A
- Overall dimensions: 69"L x 50"W x 58"H

Options

- 220V, single-phase
- Pneumatic hole punch
- Split conveyor
- Mushroom seal knives



Shown with Heat Shrink Tunnel Model 6022, available separately.

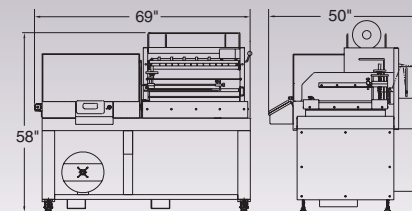

New!
MODEL 6700EX Intermediate Automatic L-Sealer

Exceptional patented features and unmatched value

The 6700EX offers packagers high quality at a market-leading price—a combination that delivers unbeatable value.

Standard Features

- 20" x 26" x 6"H seal area
- Production speeds of up to 25 ppm
- Patented constant heat solid-seal knife sealing system with rounded corner
- Mitsubishi PLC control
- Independent digital temperature controls for seal knives
- Self-aligning lower seal pads
- Upper film cradle with film splitter and patented film dancer bar to utilize center-folded film up to 21" wide
- Film advance system with standard pinch rollers for film control and better economy
- Scrap removal system
- Patented quick-adjusting infeed conveyor
- Fixed speed conveyors with product staging capability
- Vertical and horizontal product sensors
- Patented micro-perforator roller for uniform air evacuation
- Interlocked seal area guarding
- Emergency stop
- Casters and levelers
- One-year limited warranty

Options


- Closing conveyor for small package transferability

Specifications

- 220V, 1 phase, 80 psi @ 1 cfm
- Overall dimensions 81"L x 40"W x 67"H
- Manufactured for Clamco Corporation by an ISO 9001 BSI certified company. All parts, service, and support provided by Clamco.



Shown with Heat Shrink Tunnel Model 6022, available separately.

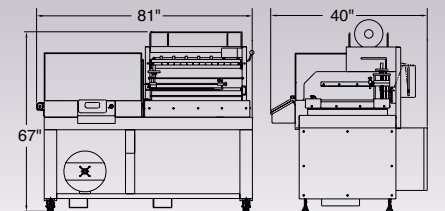

CLAMCO

Your one source for packaging systems